

TECHNICAL DATA SHEET


DAB6-225EV



ELECTRIC VEHICLE applications are wide and varied with many durability & power demands placed firmly on the batteries shoulders. ELECTRIC VEHICLE AGM always delivers when you need it, whatever your DC requirement in general EV applications. Tough ABS case with INSERT TERMINALS as standard, smaller sizes with FASTON. Special Active Material Formulation & AGM Technology delivers cranking amps, general power and long/deep discharges. GOOD CYCLE LIFE and resistance to mechanical stress and the elements all in one battery.

	Dimensions mm - kg						Dimensions Inches - lbs						Cold Cranking Amps		
	Length	Width	Height Auto	Height Insert	Height Battery	Weight	Length	Width	Height Auto	Height Insert	Height Battery	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)
DAB6-225EV	244	188	272	257	275	32.8	9.59	7.40	10.71	10.12	10.83	72.32	1171	1058	973

	Volts	Thread size mm	Reserve Capacity - Mins					Capacity - Ampere Hour*						
			75 Amps	25 Amps	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	20 Hr	10 Hr	5 Hr	3 Hr	1 Hr
DAB6-225EV	6	8	151	474	617	849	1814	279	262	243	222	198	183	150

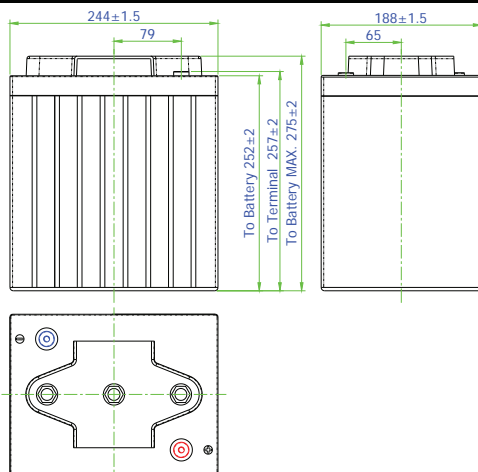

EV Charging - To obtain maximum cycle life from your EV battery it is important that a suitable charging profile is used.

For information about our range of chargers and our recommended charging profile contact us.

NOTE : All our AGM batteries are true cycling batteries, plate chemistry is specifically for cyclic applications.